



QA Checklist		Initial
Pre-pour	Dimensions & Mesh	
	Block Outs	
	Inserts, Chairs	
	Lifting Devices	
	Form Oil	
	Form Condition	
Post-pour	Cover > 1/2"	
	Lifting Devices	
	Defects	
	Dimensions	
	Date Manufactured	
Stenciled		

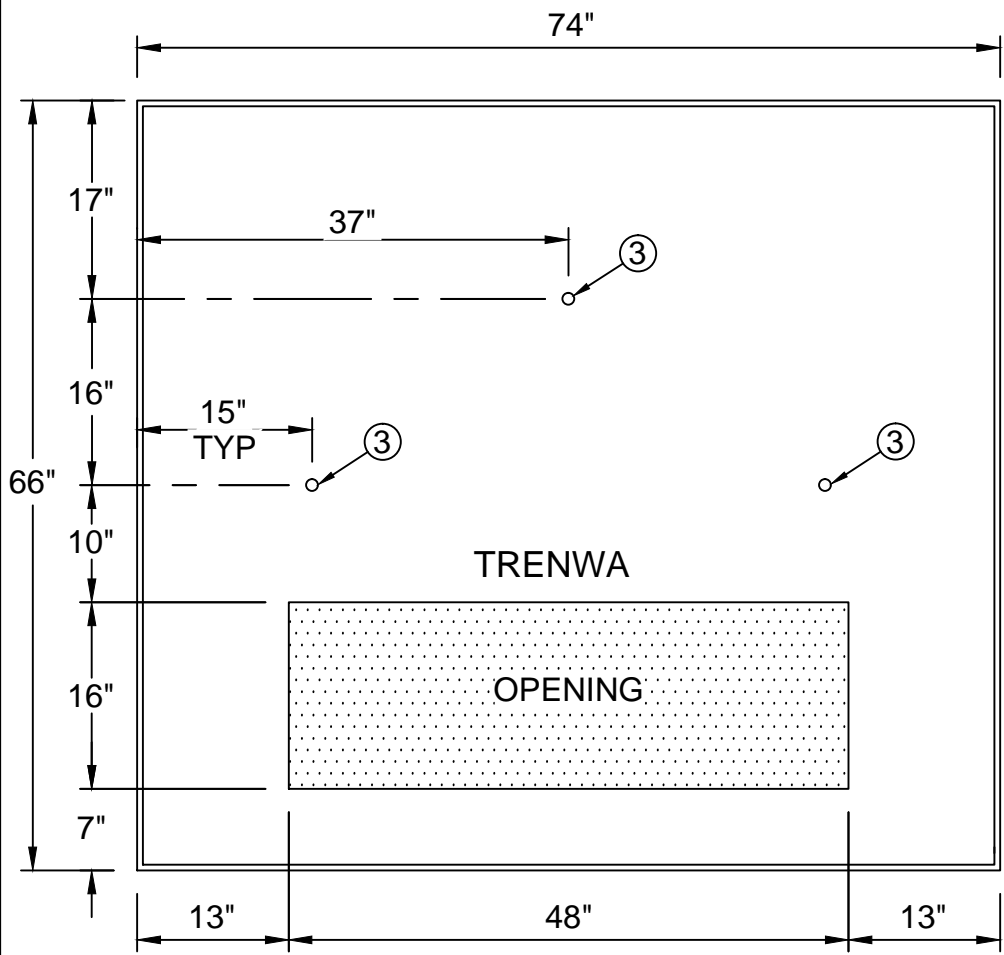

PLAN VIEW

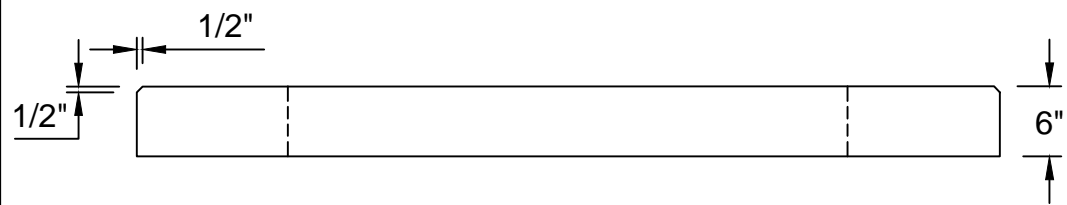

ELEVATION VIEW

NOTES:

1. THE COIL & TIE DOWN INSERTS SHALL BE SET FLUSH OR NO MORE THAN 1/4" BELOW THE TOP OF THE PAD.
2. INSERTS SHALL BE PROVIDED WITH PLASTIC PLUGS.
3. LIFTING COIL INSERT SHALL BE 3/4 x 3 MEDCO CX24 OR EQUAL.
4. CONCRETE SHALL HAVE MINIMUM STRENGTH OF 4,000 PSI AT 28 DAYS.
5. CURING TIME BEFORE DELIVERY SHALL BE A MINIMUM OF 14 DAYS AS LONG AS MINIMUM STRENGTH OF 4,000 PSI HAS BEEN ACHIEVED.
6. ALL REINFORCING BARS SHALL BE GRADE 60 WITH YIELD STRENGTH OF 60,000 PSI. ALL REINFORCING BARS SHALL BE WELDED OR TIED.
7. 6" x 6" NO. 10 WIRE MESH SHALL BE INSTALLED BELOW REBAR THROUGHOUT THE ENTIRE PAD.

Trenwa Inc.		1419 Alexandria Pike Fort Thomas, KY 41075
(859) 781-0831		
SCALE: 3/4"=1'-0"	DRAWN BY: BD	DATE: 5/6/2016
TAMPA ELECTRIC COMPANY		
PRECAST PAD FOR THREE PHASE URD MOUNTED TRANSFORMER		TEC. NO. 2001317

APPROX. 2,075#