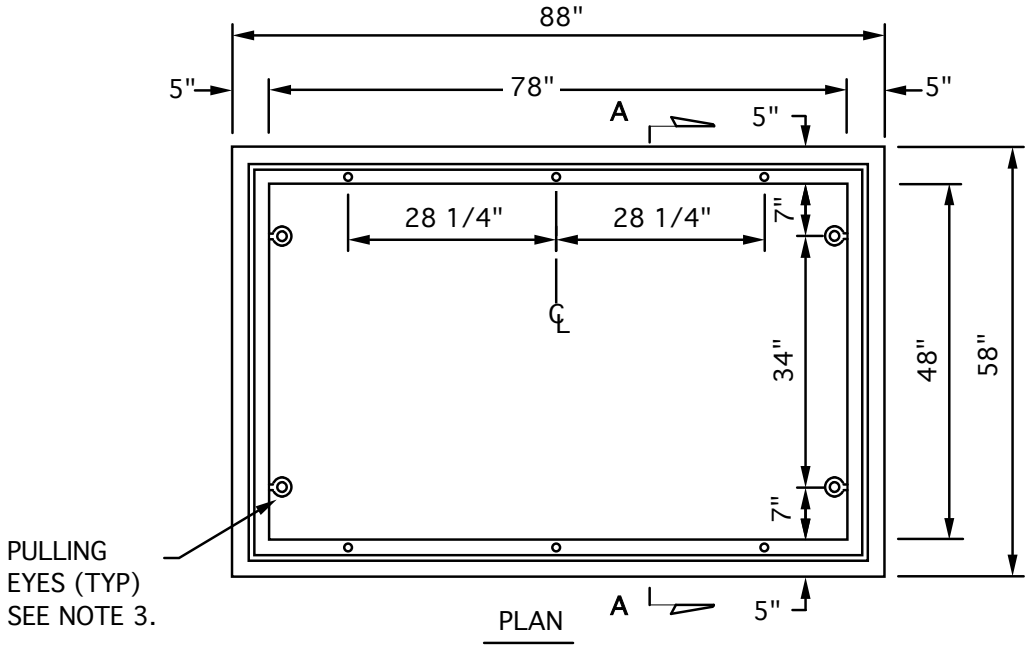

PLAN

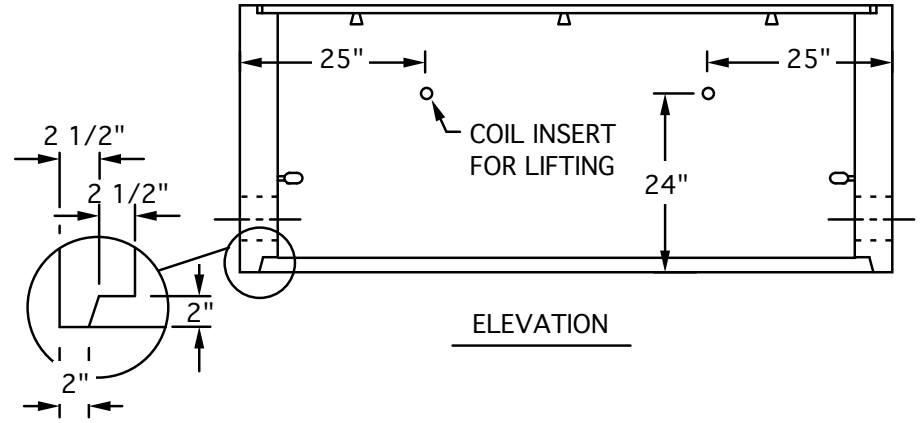

ELEVATION

SHIPLAP GROOVE

CONCRETE PULL/SPLICE BOX TOP
HS20 RATED 32,000#/AXLE
FITS 320181 BOTTOM & 300406 HS20 STEEL LID
WEIGHT=4100 lbs.

NOTES:
1. INSTALL TWO (2) 6" WIDE FLARE BELLED END ADAPTERS TO ACCEPT 6" SCHEDULE 40 PVC AS SHOWN AT EACH END. INSTALL REMOVABLE PLUGS IN EACH ADAPTER PRIOR TO SHIPMENT.
2. SURFACE AREAS TO BE FREE OF SHARP EDGES AND EXCESS CONCRETE.
3. PULLING EYE TO BE 3/4" COIL ROD WITH EYE NUT AND COIL NUT. INSTALLED JUST ABOVE EACH ADAPTER OPENING.
5. FRAME TO BE INSTALLED WITH 1/2" RECESS TO ALLOW COVER TO SET FLUSH.
6. COVER TOP WITH GALVANIZED STEEL FRAME. (2 1/2" x 2 1/2" x 1/4" ANGLE)
7. TOP TO HAVE 6 HOLES DIMENSIONED TO MATCH COVER.

REINFORCING
SHORT SIDE #4- 30" BARS 15", 2 @ 12",15"
LONG SIDE #4 - 30" BARS 13", 4 @ 14". 13"
HORIZONTAL #4 -54" BARS 3 @10"
#4 - 83" BARS 3 @ 10"
CORNERS - #4 6" x 6" L BARS TOP & BOTTOM

QC CHECKS	INIT
CAGE DIMS	
PLACEMENT	
SETUP	
FORM	
DATE	

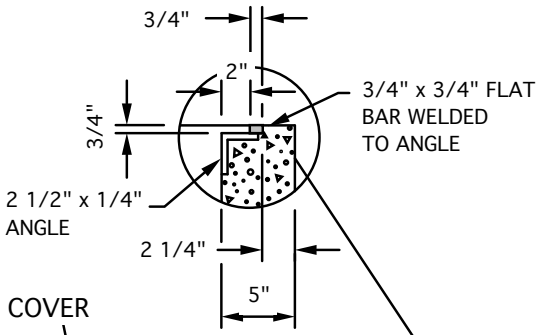

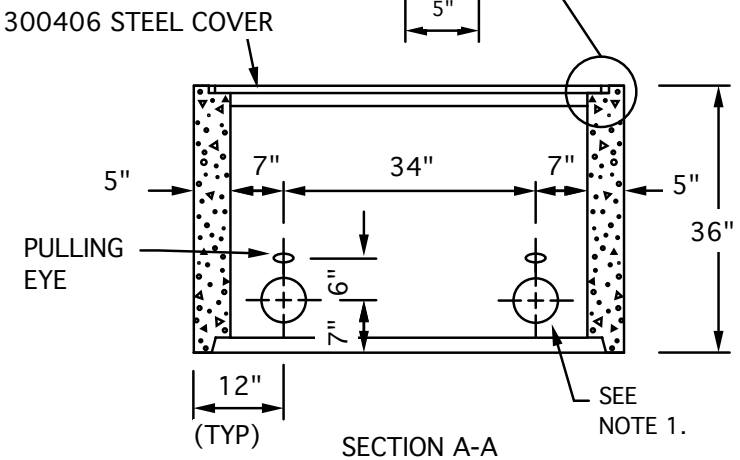

SECTION A-A

TRENWA INC.		
1419 ALEXANDRIA PIKE	FORT THOMAS, KY. 41075	859-781-0831
CONCRETE PULL/SPLICE BOX	DATE 6/11/15	DRAWING NO. 320180